



SSD-5



SSD-5-TRISG



SSD-5-TRISG-A



Scan for Current
Matko Manuals

SSD-5 Data Sheet

5" High Character 6 Digit Display



Enclosure: Powder-coated Aluminum IP65 / NEMA 4
Flat wall mount bracket included

Power: 12 VDC or 100-220 VAC (5' power cable included)

Data Input: RS232, Current Loop, RS422/485


Protocol: 8 Databit No Parity, 7 Databit Odd Parity, 7 Databit Even Parity
Baud Rates 1200-19200

Options:

UL Approval
Wireless input


DC power 12-35 VDC
Stainless Steel Enclosure

Tilt Mounting Bracket

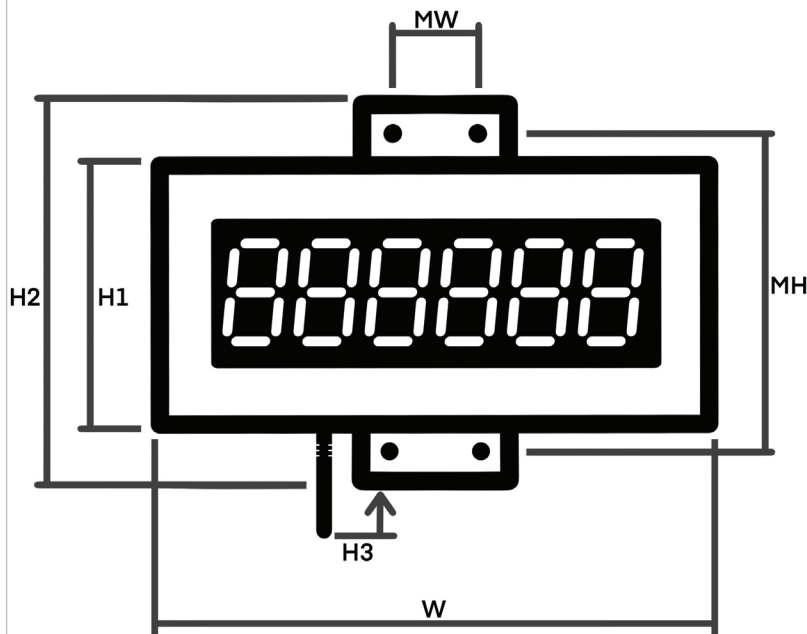

Model

Front Profile

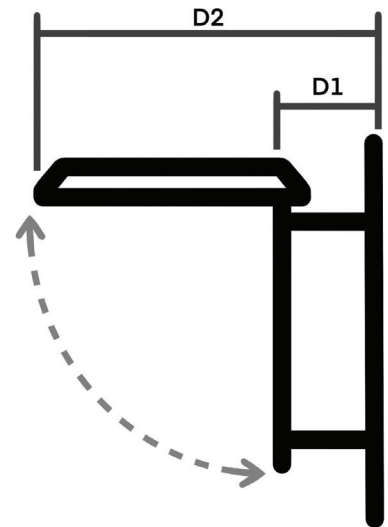

Side Profile

Model	W	H1	H2	H3	MW	MH	D1	D2
SSD-5	33	14	15	5	4	12	3.5	16
SSD-5-TRISG	38	13.5	13	5	4	12	3.5	16
SSD-5-A	35.5	14	15	5	4	12	3.5	16
SSD-5-TRISG-A	42.5	13.5	13	5	4	12	3.5	16

Display Sizes (Inches)