



**SSD-8**



**SSD-8-TRISG**



Scan for Current  
Matko Manuals

# SSD-8 Data Sheet

## 8" High Character 6 Digit Display



**Enclosure:** Powder-coated Aluminum IP65 / NEMA 4  
Flat wall mount bracket included

**Power:** 12 VDC or 100-220 VAC (5' power cable included)

**Data Input:** RS232, Current Loop, RS422/485


**Protocol:** 8 Databit No Parity, 7 Databit Odd Parity, 7 Databit Even Parity  
Baud Rates 1200-19200

**Options:**

UL Approval  
Wireless input


DC power 12-35 VDC  
Stainless Steel Enclosure

Tilt Mounting Bracket

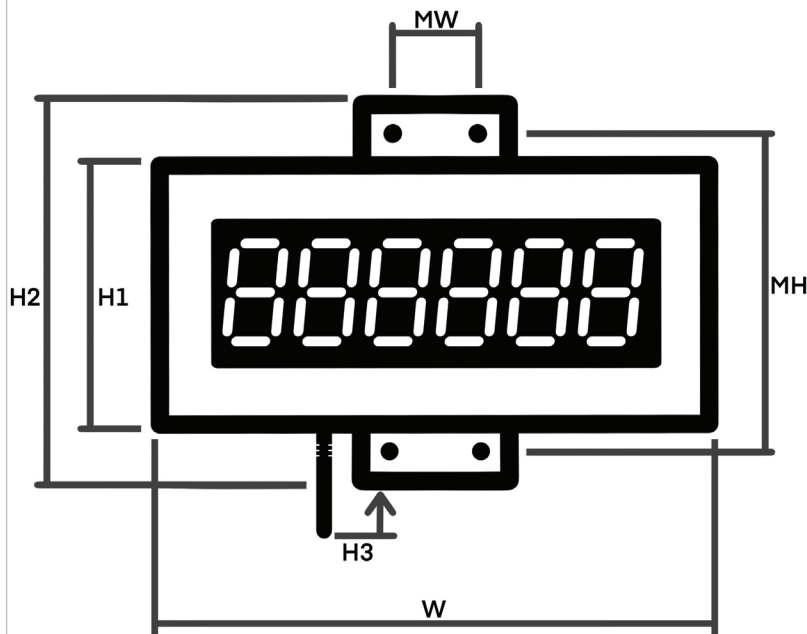

Model

*Front Profile*

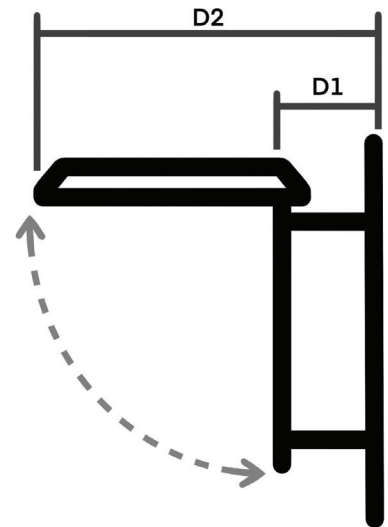

*Side Profile*

| Model         | W    | H1 | H2 | H3 | MW | MH    | D1  | D2 |
|---------------|------|----|----|----|----|-------|-----|----|
| SSD-8         | 45   | 16 | 17 | 5  | 4  | 14.75 | 3.5 | 18 |
| SSD-8-TRISG   | 53   | 16 | 17 | 5  | 4  | 14.75 | 3.5 | 18 |
| SSD-8-A       | 47.5 | 16 | 17 | 5  | 4  | 14.75 | 3.5 | 18 |
| SSD-8-TRISG-A | 58   | 16 | 17 | 5  | 4  | 14.75 | 3.5 | 18 |

Display Sizes (Inches)